

INSTALLATION MANUAL



CSVC150 STEREO VOLUME CONTROL

SPECIFICATIONS

Attenuator type:	Tapped auto transformer
Switch:	12 position rotary, make-before-break contacts
Connector:	Screw-tight type, non-removable
Input Power Rating:	Complies with UL 1492 @50 Watts RMS continuous, 150 Watts audio
Mounting:	Fits most standard gang electrical junction boxes

INSTALLATION

Installation must be made by qualified service personnel, and must meet all local codes.

Before starting connections, please note that the left and right attenuator circuits are completely isolated from each other to prevent instability when used with certain types of amplifiers which have floating grounds. If the amplifier to be used has common grounds between channels, a 3 wire system can be used between amplifier and control, but it will be necessary to connect a jumper between the control ground returns (L- & R-). If one ground is open, there will be no output on the ungrounded channel at any attenuator setting.

1. Make connections by stripping wire insulation back about 3/16". Twist any loose strands tightly.
2. Insert the wires from the amplifier into the INPUT openings of the connector, hot to hot and ground to ground, then tighten screws. Check for stray wire strands that might cause a short circuit. Make sure the metal part of the screw connector engages the bare wire, NOT the insulation!
3. Similarly, connect speaker wires to the control OUTPUT openings and tighten screws.
4. Install control in its operating location. Suggestion: Leave control 3 or 4 positions CCW from maximum before firing-up the system for the first time to avoid "blasting" the speakers, while still having enough sound to observe operation.


WARRANTY

Your AUDIOPLEX TECHNOLOGY® Stereo Speaker Volume Control is covered by a 90 day warranty against any defects in workmanship and materials. Any defects will be remedied without charge for labor or parts.


Damage incurred by shipping or accident is not considered to be a defect, and not covered by this warranty. AUDIOPLEX TECHNOLOGY,® is not responsible for defective operation caused by abuse or by modification or service by any unauthorized person or agency.

The product must be properly installed and operated according to instructions for the warranty to apply. Any necessary servicing must be done by AUDIOPLEX TECHNOLOGY.® The product must be returned expenses prepaid, with written authorization from the company. The product must be shipped with the proof of purchase and in the original carton and packing material to avoid damage.

This warranty gives you specific legal rights. You may have other rights which vary from state to state.

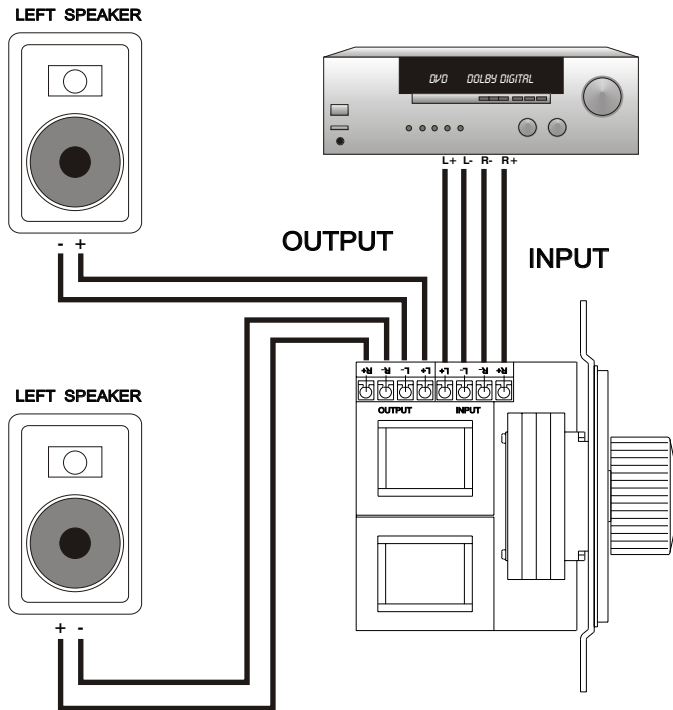

Impedance Matching Jumper Settings

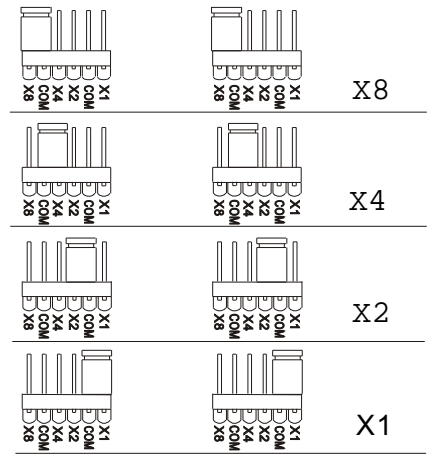

VOLUME SET AT MAXIMUM

IMPEDANCE JUMPER SETTINGS TO MATCH BACK TO 8 Ω AT AMPLIFIER				
SPEAKER OHMS(Ω)	X1	X2	X4	X8
8	1 PAIR	2 PAIR	4 PAIR	8 PAIR
4	—	1 PAIR	2 PAIR	4 PAIR

IMPEDANCE JUMPER SETTINGS TO MATCH BACK TO 4 Ω AT AMPLIFIER				
SPEAKER OHMS(Ω)	X1	X2	X4	X8
8	2 PAIR	4 PAIR	8 PAIR	16 PAIR
4	1 PAIR	2 PAIR	4 PAIR	8 PAIR

© 2010 - 9/16/2010

AUDIOPLEX TECHNOLOGY®

404 GWH P.O. BOX 440
 MELVIN VILLAGE, N.H. 03850
 1-800-257-2077 1-603-544-8601 FAX: 1-603-544-8901
 E-MAIL: sales@audioplex.com