

VC IR Target™

Conveniently and discreetly placed on one wall plate, the combined volume control and IR Target flush mounts in your wall.

System Status & Talkback End Operational Confusion

Remote control operation of concealed audio/video equipment can be very confusing and sometimes frustrating. Since you can't see the components, you may not know if they are on and available for use. With Audioplex's revolutionary miniature remote relay systems, the tiny VC IR Target ends operational confusion.

A single ultra-bright, two colored LED lets you know the status of your A/V system from anywhere an IR Target is located. The LED glows a steady green (system status) when your system is on and ready for use. The LED flashes RED (system talkback) if the batteries in your remote control are good and the IR Target is receiving the command you've sent. If your system is turned off, the LED is also off indicating you will need to return to the equipment and power it up before use.

Stop letting your system control you. Take control of your system and order

AUDIOPLEX®
TECHNOLOGY



Now, all of the necessary controls for your multi-room system are combined into one single gang wall plate. Adjust your room volume independently with the rotary knob. Control all remote control functions from hand-held IR remote controls by pointing at the VC IR

TECHNICAL DETAILS

finely Adjust Each Room's Volume

Like all Audioplex volume controls, the VC IR Target enables you to make extremely fine adjustments to each room's volume independently, via our pop-free twelve step switch

Designed For Performance

Audioplex volume controls are designed and engineered to deliver 20 to 20,000 Hz plus or minus 1 dB.

Ultra Long Range

In real world testing, the VC IR Target delivers more than twice the range of other brands of infrared systems. Your remote can typically deliver 100' of range indoors and 15' to 20' outdoors in direct sunlight with the Stealth IR Target. Additionally, Audioplex IR Targets offer extremely broad off-axis or at an angle response. Competitive products rarely work more than 25' away indoors, are intermittent off-axis and do not work at all outdoors.

Wide Compaibility

The VC IR Target is designed to relay remote control signals within the standard band (which is compatible with the vast majority of brands). Bang & Olufson remotes, two-way remotes that display CD and Tuner information on the remote itself, and RCA/ProScan remotes require alternative Audioplex products.


Lifetime Warranty

Audioplex provides a lifetime warranty guaranteeing the performance and function for the life of the original owner.

Mounting Considerations


Convenience

Typically, IR Targets are mounted in each room so that you can hold your remote control at a comfortable angle in your favorite seat and see the LED display of the VC IR Target. For volume control convenience, try to find a location near the principal doorway or the telephone.

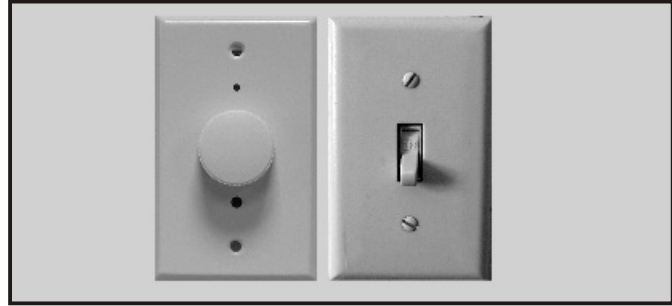


VC IRTarget Connections

Volume Control Connections

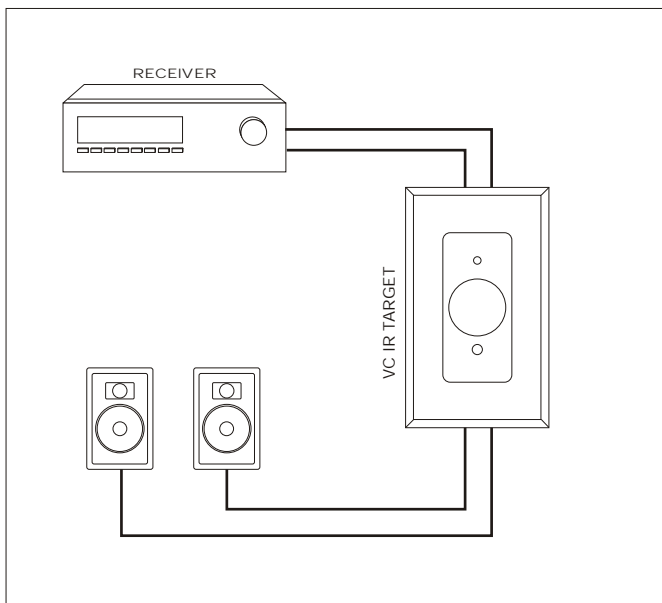

IR Target Connections

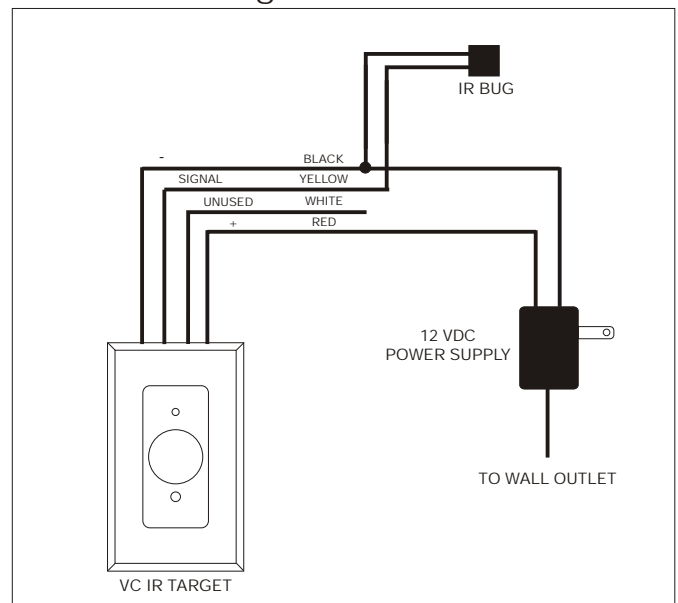

SPECIFICATIONS

Power:	12 VDC @ 500 mA power supply.
Wire:	3 conductor, 24 gauge minimum. 4 conductor recommended.
	Unshielded or shielded (Cat 5 recommended).
# of sensors	No limits.
Max. wire run:	1000' on any leg. No maximum total limits.
Compatibility:	Use standard band for all standard remote controls from 32 to 45 kHz. (Note: RCA and ProScan require dedicated 56k sensors). Use high band for B&O, Kenwood, Sony and Revox. Use two-way for Sony and Kenwood remote controls with the ability to display CD and tuner information on the remote.
Mounting Dept	VC75 1.75" / VC200 2.2"

Bang & Olufson, RCA, ProScan, Sony, Revox and Kenwood are all registered trademarks.

