

# INSTALLATION MANUAL



## RCLL-1

Remote Controlled Line Level Volume Control

### SPECIFICATIONS

Connectors: Gold plated RCA type line in and line out  
Binding posts to connect to IR Repeating system  
1/8" jack for connection of IR eye (included)

Power Supply: 12 VDC (included)

### OVERVIEW

The RCLL-1 line level remote control is a versatile means of controlling an amplifier fed by a line level source. The level may be controlled three ways: From a remote location using an infrared repeating system, using the included IR eye, or manually with a knob at the front of the unit.

### WIRING

Follow the wiring diagram on the back of this sheet, using RCA cables for the RCLL-1 to the source and amplifier. To use a remote control in the same room as the RCLL-1, plug the included IR eye into the jack on the back of the unit, and mount it in a location where it can see the remote. To connect an optional infrared repeating system, connect the signal and ground wires of the system to the binding posts, paying close attention to polarity. Set the volume control on the front to about mid range, then connect the included power supply to the jack on the rear and plug it into an AC outlet.

### OPERATION

You will need a remote control capable of transmitting Proscan Audio (amplifier or receiver) codes. Many suitable universal remotes are available at local or online retailers. Be sure that your remote can send Proscan *Audio* codes, as opposed to codes for TVs or other devices. If you have an advanced remote which can be programmed with Pronto hex codes, those codes are available at [www.audioplex.com](http://www.audioplex.com).

When the unit is first powered up, the volume will be at maximum. The RCLL-1 will respond to volume up, volume down, and mute commands of a remote programmed to send Proscan Audio codes. Holding either volume button on the remote will cause the unit to continuously change volume. The front knob may be used to limit the maximum volume.

© 2010 - 2/16/10

**AUDIOPLEX TECHNOLOGY®**


404 GWH P.O. BOX 440

MELVIN VILLAGE, N.H. 03850

1-800-257-2077 603-544-8601 FAX: 603-544-8901

[www.audioplex.com](http://www.audioplex.com)

## WIRING DIAGRAM

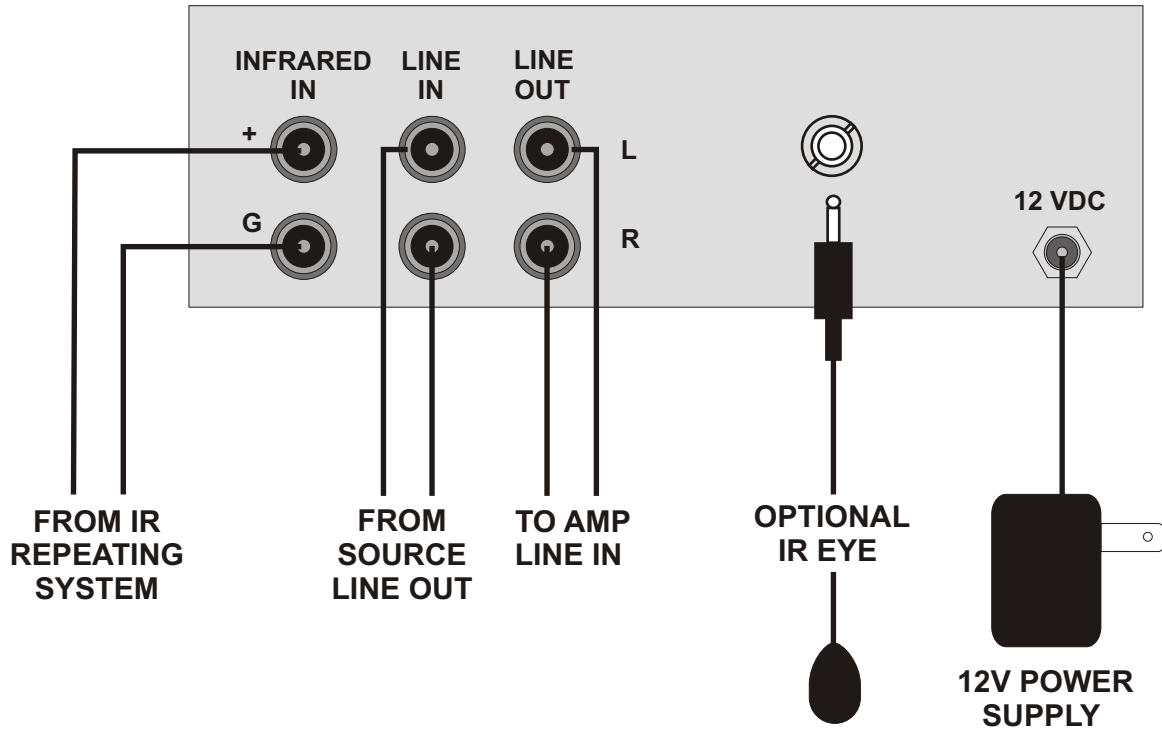

## WARRANTY

Your AUDIOPLEX TECHNOLOGY® RCLL-1 is covered by a LIFETIME WARRANTY against any defects in workmanship and materials. Any defects will be remedied without charge for labor or parts.

Damage incurred by shipping or accident is not considered to be a defect, and not covered by this warranty. AUDIOPLEX TECHNOLOGY® is not responsible for defective operation caused by abuse or by modification or service by any unauthorized person or agency.

The unit must be properly installed and operated according to instructions for the warranty to apply. Any necessary servicing must be done by AUDIOPLEX TECHNOLOGY.® The products must be returned expenses prepaid, with written authorization from the company. The product must be shipped with the proof of purchase and in the original carton and packing material to avoid damage.

© 2010 - 2/16/10

## **AUDIOPLEX TECHNOLOGY®**

404 GWH P.O. BOX 440  
MELVIN VILLAGE, N.H. 03850  
1-800-257-2077 603-544-8601 FAX: 603-544-8901  
www.audioplex.com