



SPEAKER LEVEL FADER

Connector:	Screw-tight type, non-removable.
Input Power Rating:	UL Listed @ 72 Watts RMS per channel, 35Hz-20 KHz, 216 Watts audio.
Transformers:	Tri-filar wound for flat response and minimum phase shift, grain oriented, high silicon steel laminations.
Mounting:	Fits in most standard single electrical junction boxes, with depth less than 2 1/4".

The FADER is designed to allow different volume levels for front and rear speakers in a system. This is perfect for situations such as a party where one speaker pair is low for conversation, and the other speaker pair is at volume. This is also great for balancing the volume levels of ceiling speakers mounted at different heights.

INSTALLATION

Installation must be made by qualified service personnel, and must meet all local codes

Follow the wiring diagrams on the back of this sheet for your installation type. Note that grounds from the receiver should bypass the Speaker Level Fader and run directly to the speakers.

1. Make connections by stripping wire insulation back about 3/16". Twist any loose strands tightly to avoid short circuits.
2. Insert the wires from the amplifier into the INPUT openings of the connector, hot to hot and ground to ground, then tighten screws. Check for stray wire strands that could cause a short circuit. Make sure that the metal part of the screw connector engages the bare wire, NOT the insulation.
3. Similarly, connect the speaker wires to the output openings on the connectors and tighten the screws.
4. Install the control in its operating position.

WARRANTY


Your AUDIOPLEX TECHNOLOGY(tm) Speaker Level Fader is covered by a LIFETIME warranty against defects in workmanship and materials. any defects will be remedied without charge for labor or parts.

Damage incurred by shipping or by accident is not considered to be a defect, and not covered by this warranty. AUDIOPLEX TECHNOLOGY(tm) is not responsible for defective operation caused by abuse or by modification or service by any unauthorized person or agency.



The product must be properly installed and operated according to instructions for this warranty to apply. Any necessary servicing must be done by AUDIOPLEX TECHNOLOGY(TM). The product must be returned expenses prepaid, with written authorization from the company. The product must be shipped with the proof of purchase and in the original carton and packing material to avoid damage.

This warranty gives you specific legal rights. You may have other rights which vary from state to state.

SPEAKER LEVEL FADER

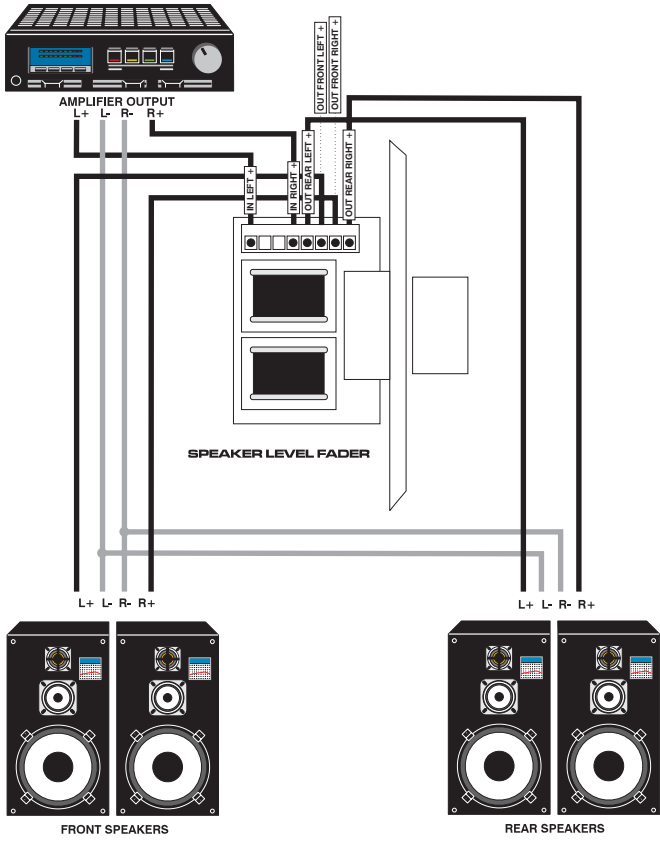

SPEAKER LEVEL FADER
wired with Match-it's

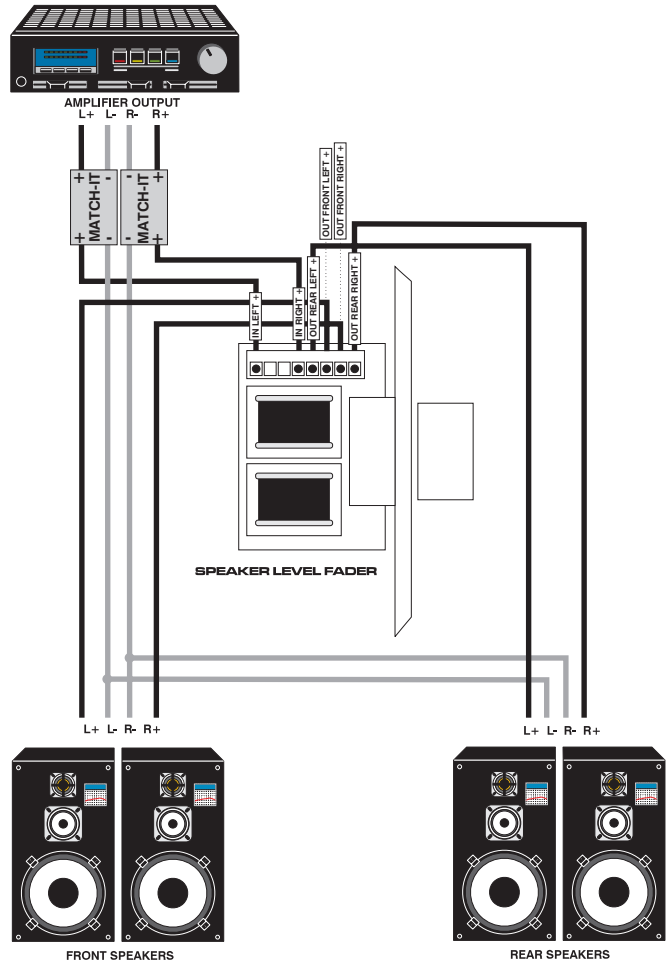

VOLUME CONTROL

SPEAKER LEVEL FADER
wired with stereo volume control

