

INSTALLATION MANUAL

AUDIOPLEX[®] TECHNOLOGY

LITTLE AMP

Line Level Stereo Amplifier


SPECIFICATIONS

Connectors:	RCA type line in and out.
Power supply:	12 VDC (supplied)
Power rating:	1/3Watt RMS/ channel
Optional Jack:	1/8" headphone

INSTALLATION

The LITTLE AMP can be used to boost line level volume signals, or also works well as a headphone amplifier. Sources such as CD, DAT, DCC, Tuners or the audio part of a laser disc can be conveniently used as the single input source.

A suggested hookup diagram is shown below. All LITTLE AMP connectors are RCA type phone jacks. Readily available shielded phono cables with RCA plugs should be used. NOTE: When headphones are being used, the RCA output on the back of the chassis is disabled.

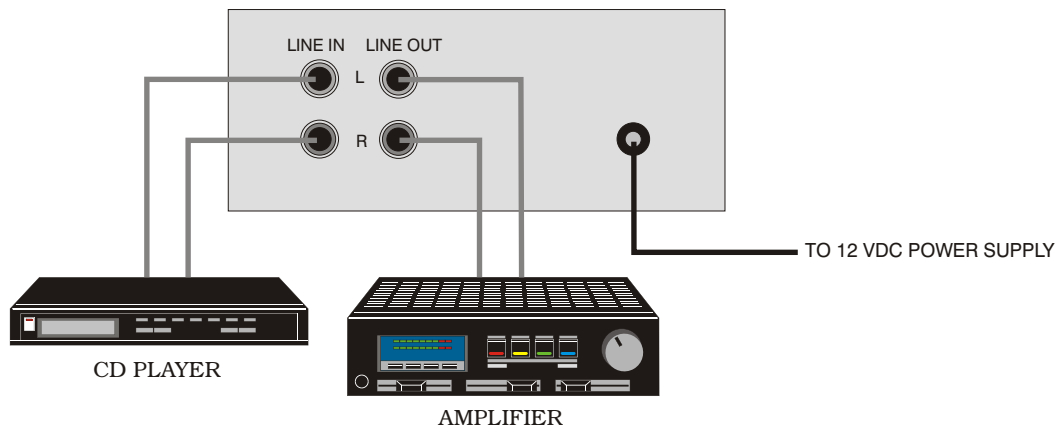

Your AUDIOPLEX TECHNOLOGY[®] LITTLE AMP is covered by a LIFETIME warranty against any defects in workmanship and materials. Any defects will be remedied without charge for labor or parts during this period of time following the date of purchase.

Damage incurred by shipping or accident is not considered to be a defect, and not covered by this warranty. AUDIOPLEX TECHNOLOGY[®] is not responsible for defective operation caused by abuse or by modification or service by any unauthorized person or agency.

The unit must be properly installed and operated according to instructions for the warranty to apply. Any necessary servicing must be done by AUDIOPLEX TECHNOLOGY[®]. The products must be returned expenses prepaid, with written authorization from the company. The product must be shipped with the proof of purchase and in the original carton and packing material to avoid damage.

AUDIOPLEX TECHNOLOGY[®]

404 GWH PO BOX 440

MELVIN VILLAGE, NH 03850

1-800-257-2077 1-603-544-8601 FAX: 1-603-544-8901

E-MAIL: sales@audioplex.com

© 2003 - 3/11/03

INSTALLATION MANUAL



LITTLE AMP

Line Level Stereo Amplifier


SPECIFICATIONS

Power supply: 12 VDC
Power rating: 1/3Watt RMS/ channel

INSTALLATION

The LITTLE AMP can be used to boost line level volume signals, or also works well as a headphone amplifier. Sources such as CD, DAT, DCC, Tuners or the audio part of a laser disc can be conveniently used as the single input source.

A suggested hookup diagram is shown below.

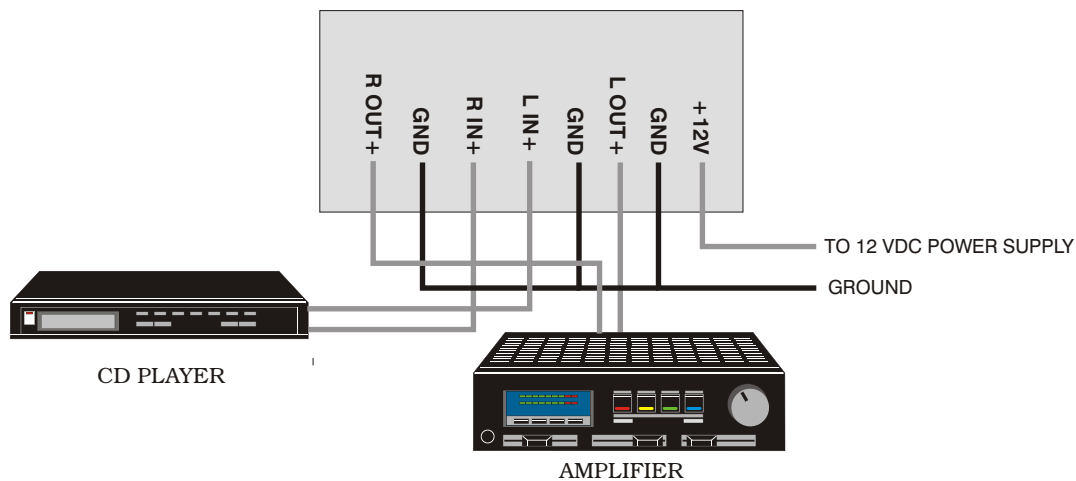

Your AUDIOPLEX TECHNOLOGY® LITTLE AMP is covered by a LIFETIME warranty against any defects in workmanship and materials. Any defects will be remedied without charge for labor or parts during this period of time following the date of purchase.

Damage incurred by shipping or accident is not considered to be a defect, and not covered by this warranty. AUDIOPLEX TECHNOLOGY® is not responsible for defective operation caused by abuse or by modification or service by any unauthorized person or agency.

The unit must be properly installed and operated according to instructions for the warranty to apply. Any necessary servicing must be done by AUDIOPLEX TECHNOLOGY®. The products must be returned expenses prepaid, with written authorization from the company. The product must be shipped with the proof of purchase and in the original carton and packing material to avoid damage.

© 2003 - 3/11/03

AUDIOPLEX TECHNOLOGY®

404 GWH PO BOX 440

MELVIN VILLAGE, NH 03850

1-800-257-2077 1-603-544-8601 FAX: 1-603-544-8901

E-MAIL: sales@audioplex.com