

INSTALLATION MANUAL



AUTO AMP-15

Your AUTO AMP-15 is a free standing amplifier/switcher that allows your television audio signal to be amplified and played through the home stereo speaker system. The unit can be triggered either from the television's audio output or video output. When not in use, the home stereo signal passes through the AUTO AMP-15 and is unaffected.

SPECIFICATIONS

Connectors:	Stereo Input/Output: Spring Clips / Television Input: RCA Jacks
Power supply:	24 VAC (supplied)
Switch:	ON/OFF rocker switch
Amplifier Power:	15 Watts RMS, 45 Watts Audio
Power Handling:	500 Watts Audio
Dimensions:	12"W x 2.75"H x 5"D

INSTALLATION

Connections to the system components (receiver, speakers and television) are illustrated on the back of this sheet. Prepare the wires for connection by stripping about 3/16" from the ends. Twist strands tightly so that no loose ends stick out to cause problems with short circuits. Make connections to the rear panel terminals by pushing the connector tabs towards the chassis until the wire hole is fully open. Insert the wire and release the tab.

The unit must be turned on for television activation (stereo operation will be unaffected if unit is off). The AUTO AMP-15 has controls for GAIN, SENSITIVITY, and DELAY. The GAIN control should be set by the installer and left alone. With the television volume set at about 2/3rds, Set the GAIN control to a comfortable level with no distortion. The SENSITIVITY control sets the signal level at which the unit switches from the stereo system signal to the television signal (the sensitivity control has no affect on the video trigger, only the audio trigger is affected).

The DELAY control sets the amount of time with no signal, before the unit switches back to the stereo system (such as dead air between commercials, etc.).

WARRANTY


Your AUDIOPLEX TECHNOLOGY® AUTO AMP-15 is covered by a lifetime warranty against any defects in workmanship and materials. Any defects will be remedied without charge for labor or parts.

Damage incurred by shipping or accident is not considered to be a defect, and not covered by this warranty. AUDIOPLEX TECHNOLOGY®, is not responsible for defective operation caused by abuse or by modification or service by any unauthorized person or agency.

The unit must be properly installed and operated according to instructions for the warranty to apply. Any necessary servicing must be done by AUDIOPLEX TECHNOLOGY.® The product must be returned expenses prepaid, with written authorization from the company. The product must be shipped with the proof of purchase and in the original carton and packing material to avoid damage.

This warranty gives you specific legal rights. You may have other rights which vary from state to state.

WIRING DIAGRAM

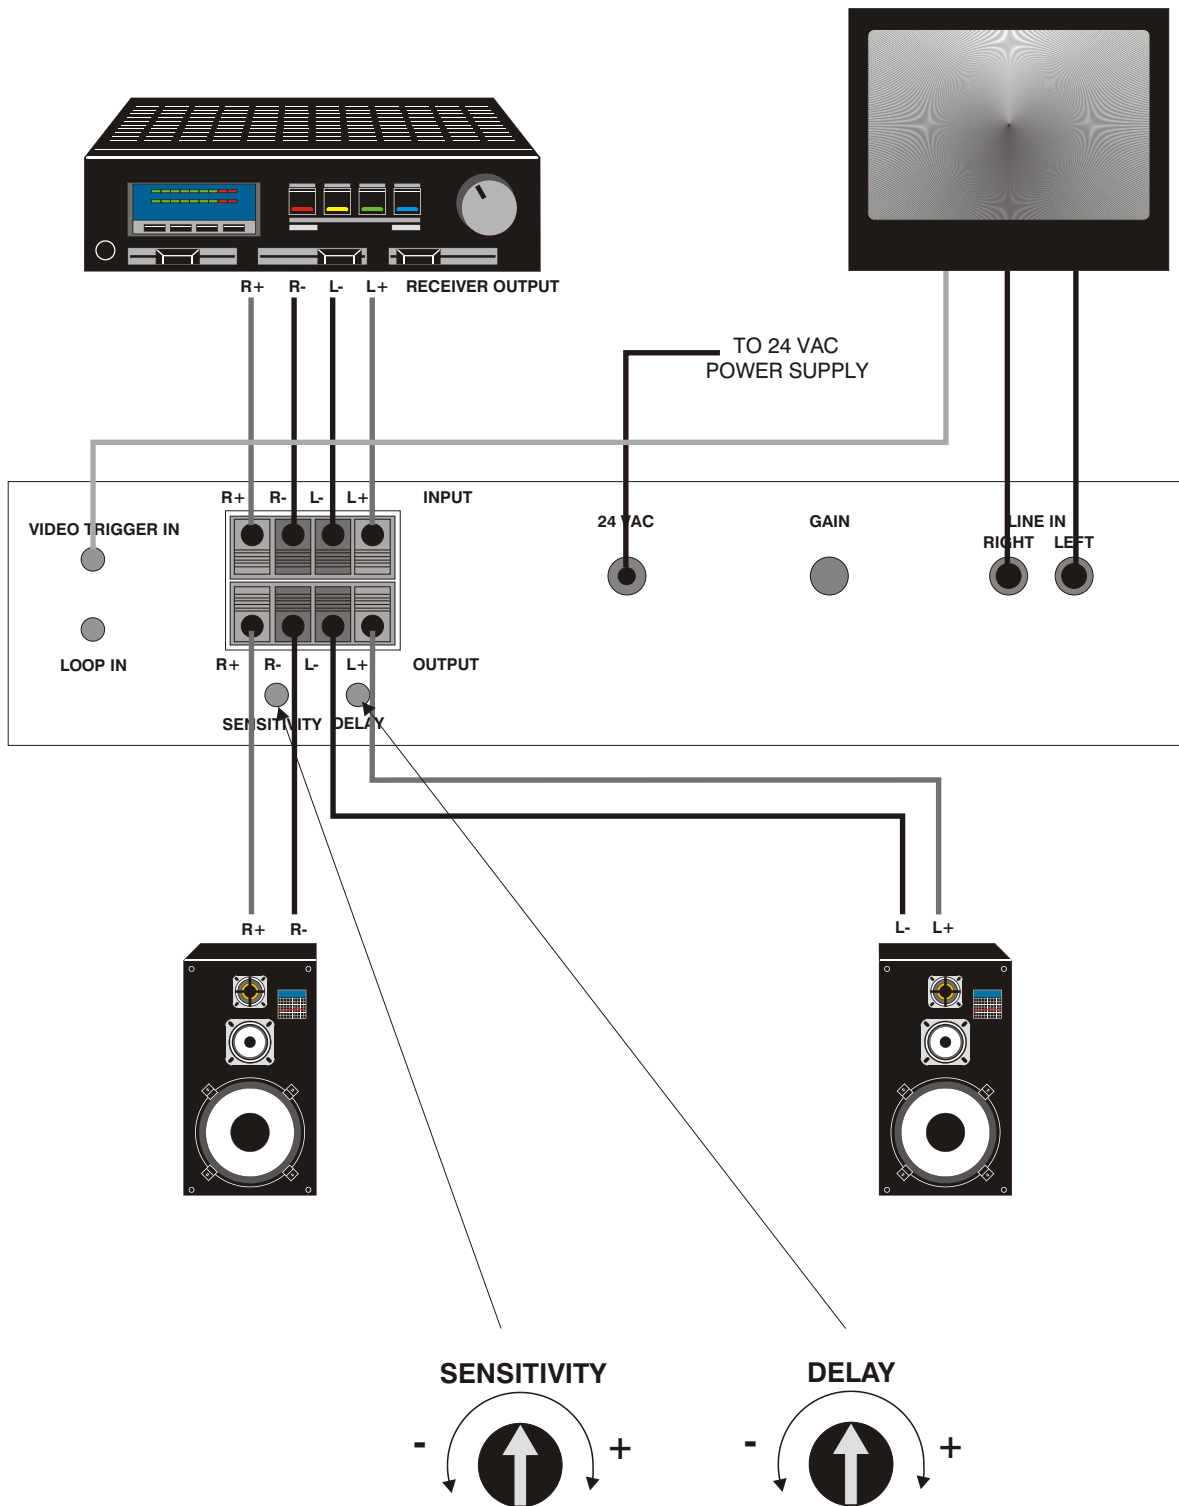

© 1999 - 5/6/99

AUDIOPLEX TECHNOLOGY®

404 GWH P.O. BOX 440
MELVIN VILLAGE, N.H. 03850
800-257-2077 603-544-8601 FAX: 603-544-8901
www.audioplex.com