


INSTALLATION MANUAL

AUDIOPLEX[®] TECHNOLOGY

OA-502 / OA-602

- 1) When mounting speakers, use the mounting bracket as a template for marking and drilling three holes.
- 2) Assemble mounting screws, spring washers, flat washers and nuts to attach mounting brackets to mounting surface. Note that - screws, washers and nuts provided are for mounting the cabinet from both sides of the mounting location. For any other type of mounting, please consult your local hardware store for appropriate mounting screws.
- 3) Follow the hook-up directions included with your amplifier (or receiver). Strip 1/2" (12mm) of insulation from each of the two conductors of the wire to expose the bare metal and twist each into a single strand. Connect insulated speaker wire to the speaker using the black wire with the white stripe as "+" lead which should be connected to the RED terminal and connect the plain black wire as "-" lead to the BLACK terminal.
- 4) Adjust position of the speaker to obtain the desired sound dispersion.

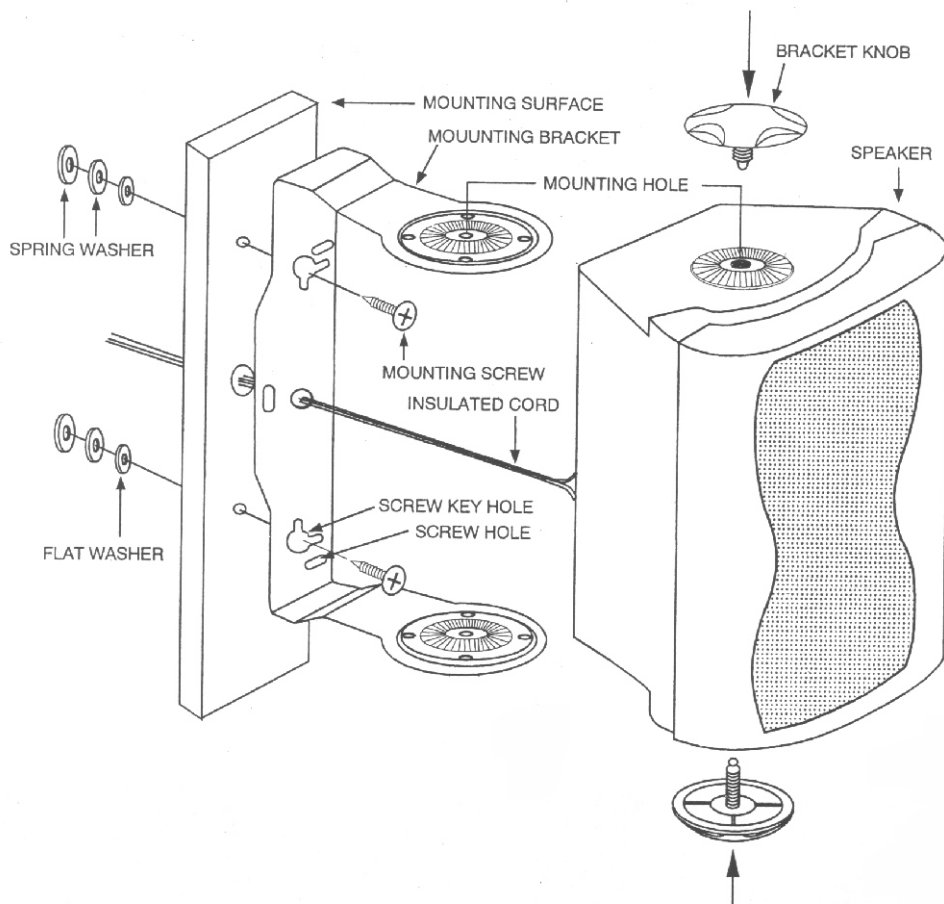

PARTS INCLUDED

Insulated Wire	(2)
Mounting Bracket	(2)
Bracket Knob	(4)
Mounting Screw	(4)
Flat Washer	(4)
Screw nut	(4)
Speaker	(2)

AUDIOPLEX TECHNOLOGY[®]

404 GWH • PO BOX 440

MELVIN VILLAGE, NH 03850 USA

800-257-2077 • FAX: 603-544-8901 • E-MAIL: sales@audioplex.com