

INSTALLATION MANUAL


AUDIOPLEX[®] TECHNOLOGY

SPKCNV SPEAKER LEVEL TO LINE LEVEL CONVERTER

SPECIFICATIONS

Connectors:	Input: Spring Clips / Output: RCA jacks
Power Handling:	150 Watts RMS
Frequency Response:	20Hz-20KHz +/-0.3dB
Total Harmonic Distortion:	Less than 0.05%
Input Impedance:	100K
Output Impedance:	10K
Size:	3.5"W x 1.25"H x 1.125"D
Weight:	0.5 lbs

The SPKCNV is designed to convert speaker level signals to line level signals in a simple, easy to use package. Prepare the speaker level wires by stripping about 1/4" of insulation from each wire end. Twist the strands tightly together so that none stick out to cause possible short circuits. Wire the unit following the diagram below. Be sure to observe polarity!

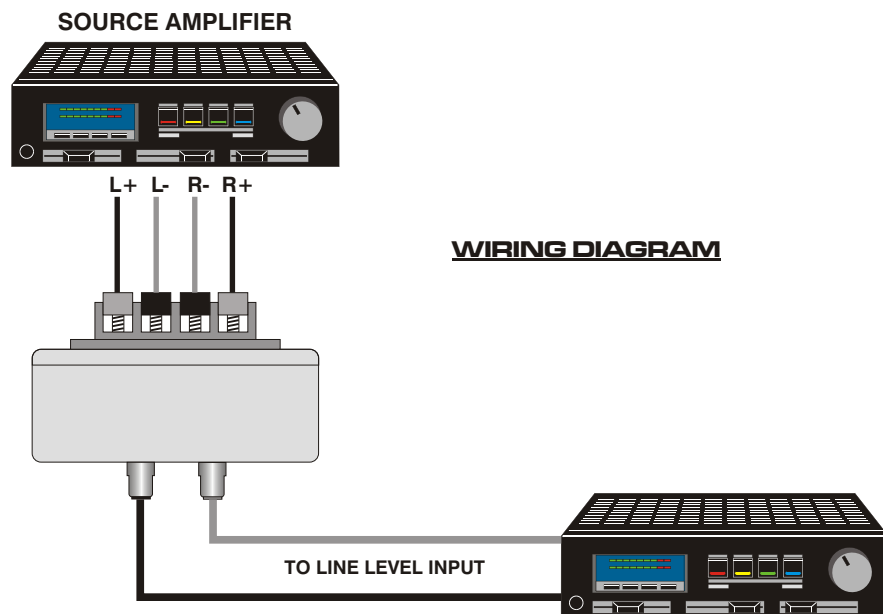

WARRANTY

Your AUDIOPLEX TECHNOLOGY[®] SPKCNV is covered by a lifetime warranty against any defects in workmanship and materials. Any defects will be remedied without charge for labor and parts.

Damage incurred by shipping or accident is not considered to be a defect, and not covered by this warranty. AUDIOPLEX TECHNOLOGY[®] is not responsible for defective operation caused by abuse or by modification or service by any unauthorized person or agency.

The unit must be properly installed and operated according to instructions for the warranty to apply. Any necessary servicing must be done by AUDIOPLEX TECHNOLOGY[®]. The product must be returned expenses prepaid, with written authorization from the company. The product must be shipped with the proof of purchase and in the original carton and packing material to avoid damage.

This warranty gives you specific legal rights. You may have other rights which vary from state to state.

AUDIOPLEX TECHNOLOGY™

404 GWH ● P.O. BOX 440 ● MELVIN VILLAGE, N.H. 03850

1-800-257-2077 ● 603-544-8601 ● FAX: 603-544-8901

www.audioplex.com