

SR 4/8/12

Combines With OptiMatch™ Volume Controls

The Audioplex SR series combines perfectly with individual OptiMatch volume controls in each room. Now you can select which speakers will play while you are at your stereo components. No walking anywhere—simply choose which rooms you want on or off. The component style control is ideal for anyone with a centrally located, easy to access stereo system.

The SR selectors incorporate no amplifier protection of their own, so they must be used with OptiMatch volume controls for each speaker pair. OptiMatch volume controls provide protection that does not waste power. All of the total power of your stereo is delivered globally to your multiroom speaker system. In a combined SR and OptiMatch system you are able to play any or all of your speakers at the same time. Regardless of the number of rooms playing, OptiMatch volume controls simply distribute all of your amplifier's power to your system.

Attractive component style SR series selectors reside with your stereo system and provide you with on/off for each room or area.



AUDIOPLEX®
TECHNOLOGY

The SR series of speaker selectors includes the SR-4, the SR-8 and the SR-12, accommodating four, eight and twelve pairs of speakers respectively. The controls of the SR selectors allow you to play any combination of speakers

TECHNICAL DETAILS

Easy, Elegant Operation

Enclosed in its sleek black enclosure with the instant on/off controls for each of your rooms, the SR series of selectors easily tames a complex multiroom system. Included with the SR series of selectors are over 50 pre-printed, self-adhesive room labels, to make your selector easy to use.

No Service Call Buttons

The SR series does not have "protection" buttons that children or inexperienced users could accidentally press. Accidental deactivation of amplifier protection can devastate your equipment, requiring expensive service calls and repairs. Audioplex SR series selectors combined with OptiMatch volume controls to provide intrinsic protection constantly. No one can damage your system accidentally.

Designed For Performance

The SR series is designed and engineered to have a ruler-flat frequency response and ultra low distortion. Audioplex delivers 20 to 20,000 Hz plus or minus 0.5 dB.

Global Power Distribution

The combination of SR series selectors and OptiMatch volume controls deliver


of your amplifier's power globally. This means that when the entire system is active, the power of your amplifier is perfectly distributed to each speaker. Of course, the system directs exactly the

same amount of power to each speaker pair, regardless of how many speakers are playing, so there are never any variations in volume when rooms are turned on and off.

Lifetime Warranty

Audioplex provides a lifetime warranty, guaranteeing the performance and function of our switchers for the life of the original end user.

APPLICATION NOTES

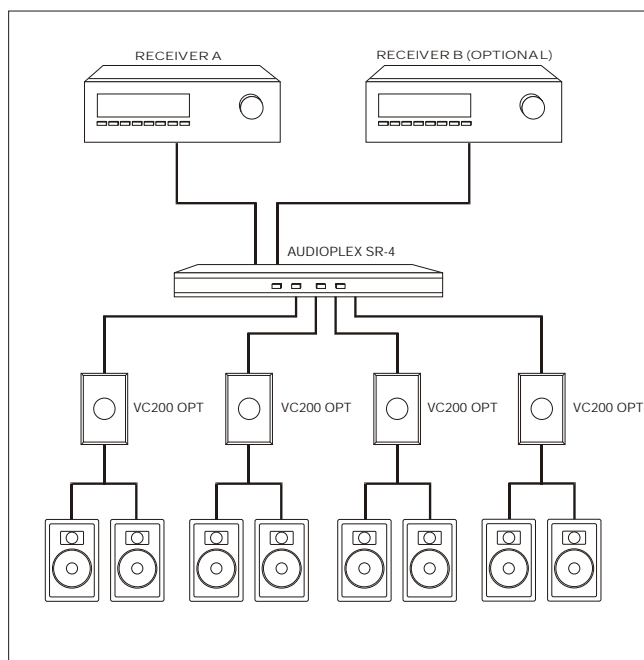

Wiring a SR-4/8/12 System

Three connections need to be made:

- 1) Connect speaker wire from the main speaker output of the amplifier/receiver to the amplifier inputs of the SR selector.
- 2) Connect speaker wire from the SR selector to the OptiMatch volume controls in each room.
- 3) Connect speaker wire from each of the OptiMatch volume controls to the speakers.

OptiMatch™ Volume Controls

Audioplex manufactures a wide range of OptiMatch volume controls that offer your system independent, local control of each room's speaker volume from an attractive shelf or flush-mounted location.

SPECIFICATIONS

Power Handling:
Speaker/Amplifier Connectors:
Dimensions:

Suitable for use with amplifiers of up to 900 watts per channel.
Screw-type connectors capable of connecting 14 gauge wire.
17"W x 1.75"H x 5.5"D.



AUDIOPLEX®

TECHNOLOGY

