

# INSTALLATION MANUAL

## AUDIOPLEX<sup>®</sup> TECHNOLOGY

CAT-5 DRIVER SERIES PATENT APPLIED FOR

### SPECIFICATIONS

|                  |                             |
|------------------|-----------------------------|
| Front Connector: | Gold Plated RCA Connectors  |
| Rear Connector:  | Screw Down Connectors       |
| Band Width:      | -3 dB BW 30 MHz at 200 feet |
| Power:           | 9 vac power supply included |


The CAT-5 Driver Series A/V distribution plates allow you to run audio and video signals over affordable CAT-5 wiring for distances of up to 500 feet. By utilizing the latest in low noise amplification, signals stay crystal clear with virtually no signal degradation.

### INSTALLATION

Determine the best routing of CAT-5 wire between your source equipment and the television monitor and run the appropriate number of CAT-5 wires for your application. Note that some CAT 5 Driver plates require two runs of wire. Using the color chart on the back of this sheet to connect the transmitter plate at the source end and the receiver plate at the television end (note that the wire locations are different on the transmitter plate and the video receiver plate). Connections are made by stripping about 1/4" of insulation off the individual wires in the CAT-5 wire, inserting the wire end into the proper locations on the screw connector and tightening screws. Typical networking practices apply.

Power can be supplied for both the transmitter and receiver plate at either location, supplied independently at both locations or powered remotely. **The default setting is for power at the transmitter.** If powered at each location, a separate power kit is available (order part number C5PK which includes both the power supply and a power plate).

### **POWER OPTIONS**

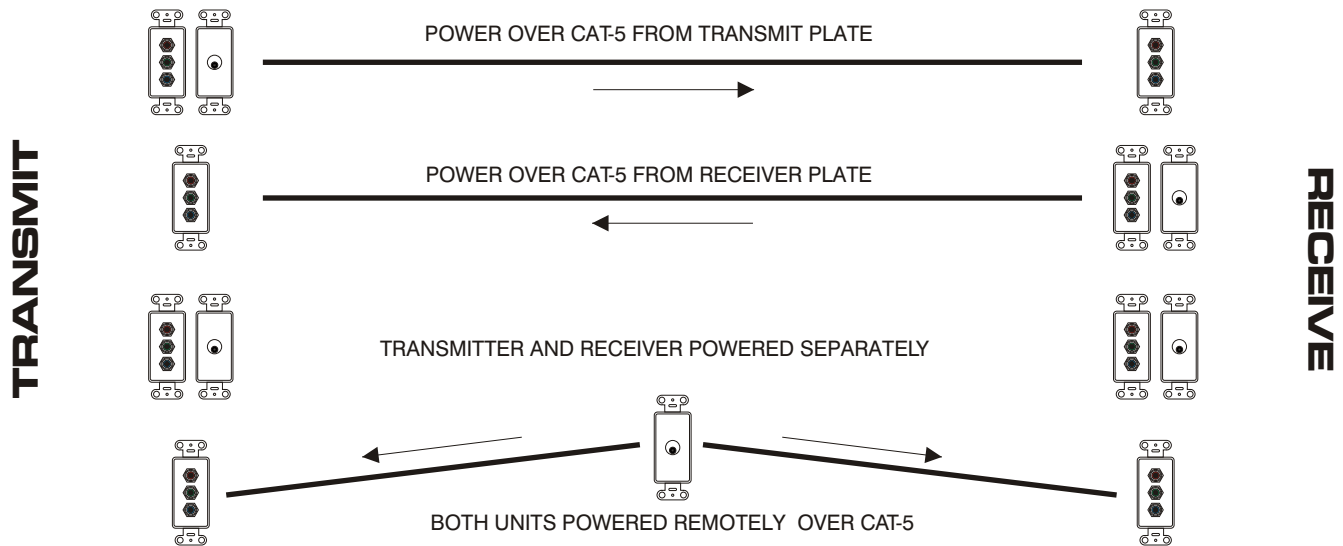

### WARRANTY


Your AUDIOPLEX TECHNOLOGY<sup>®</sup> CAT-5 Driver Plate is covered by a LIFETIME warranty against defects in workmanship and materials. Any defects will be remedied without charge for labor or parts.

Damage incurred by shipping or by accident is not considered to be a defect, and not covered by this warranty. AUDIOPLEX TECHNOLOGY<sup>®</sup> is not responsible for defective operation caused by abuse or by modification or service by any unauthorized person or agency.

The product must be properly installed and operated according to instructions for this warranty to apply. Any necessary servicing must be done by AUDIOPLEX TECHNOLOGY<sup>®</sup>. The product must be returned expenses prepaid, with written authorization from the company. The product must be shipped with the proof of purchase and in the original carton and packing material to avoid damage.

This warranty gives you specific legal rights. You may have other rights which vary from state to state.

# C5CVK COMPONENT VIDEO KIT WIRING CHART

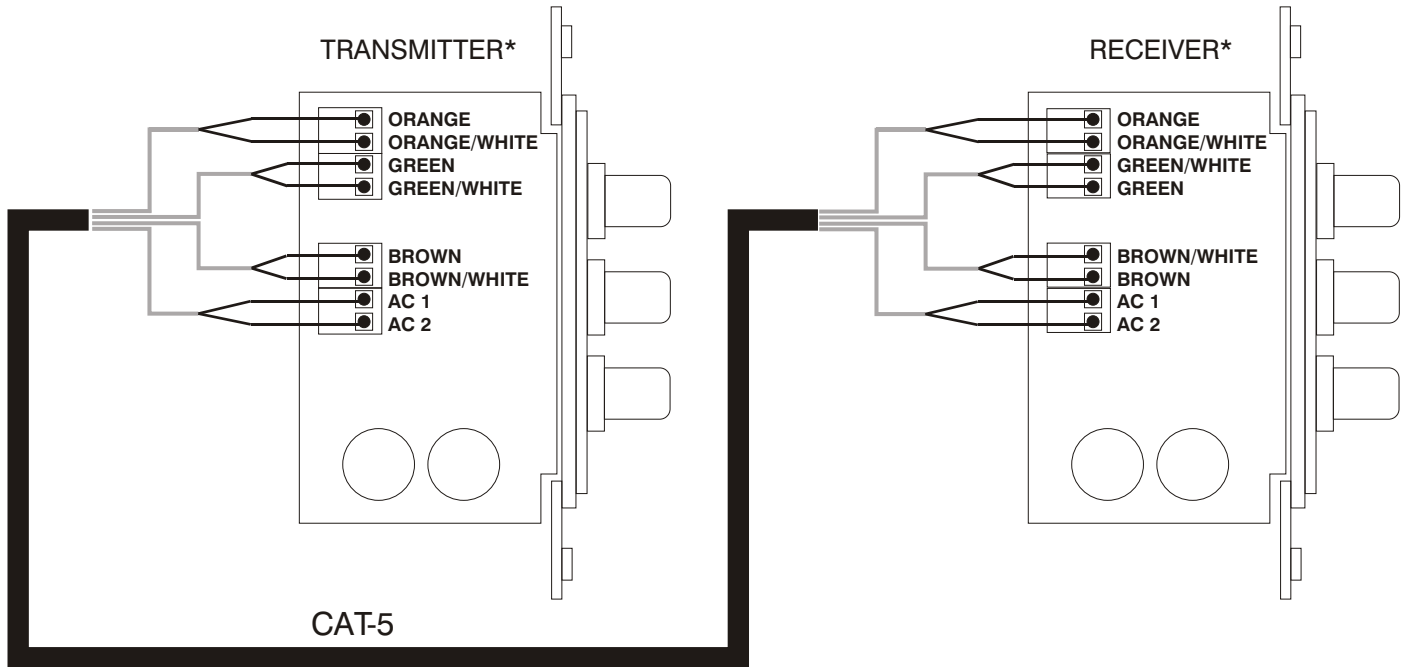

**\* IMPORTANT** Please note that the wire locations are different on the transmitter and video receiver plates.

## TYPICAL CAT 5 DRIVER PLATE APPLICATION

